




Sediment Control Test Results

Client Earth Support Systems
TRI Log # E2256-11-02

Project # N0004
Technician JAN


Sample	Fabric Description	Soil Type	Test Configuration	Flow Volume (L)	Flow Time (sec)	Initial Mass of Soil (g)	Final Mass of Soil (g)	Filtering Efficiency (%)
Sediguard (TM)	Drain/Curb Inlet Sediment Control Device	ID#3 (sand) sieved through No. 10 sieve	Drain Inlet	50	20	150	61.41	59.1

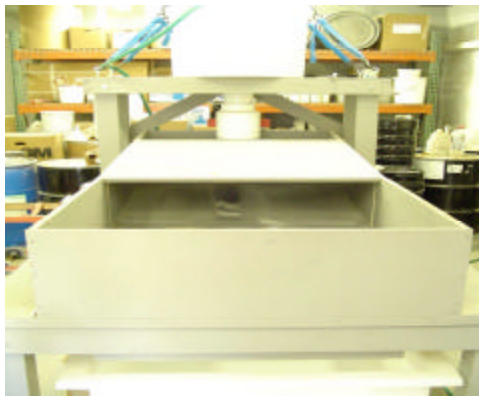

Sediment Control Apparatus



Drain Inlet - Pre Test

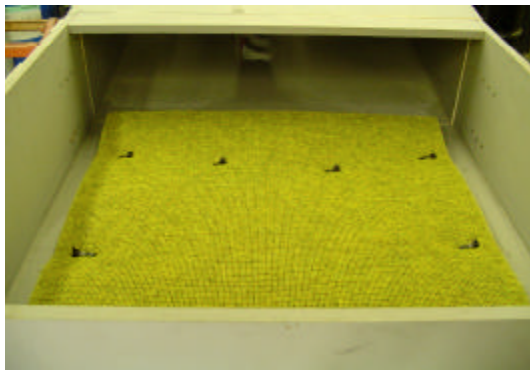

Sediguard (TM)



Drain Inlet - Post Test